

NP -6111 -JH2

- Fanless, Low power consumption
- PoE, DIO and Light Control all in one

■ Features


- 2 x Intel GbE LAN controller
- 4 x USB on the front, 1 x USB2.0 on board for USB dongle
- 2 x RS232/485, RS485 support auto flow control
- 2 x Intel GbE PoE LAN, max. 15w per channel.
- 4 x PWM light control support external trigger input
- 8 x isolated DI, 8 x isolated DO
- 1 x miniPCIE expansion slot support Wifi,3G/4G modules
- DC12~24V Power supply with overcurrent, overvoltage and polarity inverseprotection
- Support wall-mounted or DIN -Rail fixing style
- Fully enclosed structure, fanless and no cable design
- Wide operating temperature -20 ~ 60°C supported




■ Specifications

Model Name		NP -6111 -JH2 -J1900	NP -6111 -JH2 -E3845	NP -6111 -JH2 -J3455	NP -6111 -JH2 -J6412
System	CPU	Intel® Celeron J1900, 2.0GHz, 4 cores/4 threads, 2MB L2 cache	Intel® Atom E3845, 1.91GHz, 4 cores/4 threads, 2MB L2 cache	Intel® Celeron J3455, 1.5~2.3GHz, 4 cores/4 threads, 2MB L2 cache	Intel® Celeron J6412, 2.0~2.6GHz, 4 cores/4 threads, 1.5MB L2 cache
	TDP	10W			
	BIOS	AMI UEFI 64Mbit			
	Memory	1 x SO-DIMM DDR3L - 1333MHz (max. 8GB)			1 x SO-DIMM DDR4 - 2400MHz (max. 16GB)
	Storage	1 x mSATA bay			
	USB	1 x USB3.0, 3 x USB2.0		2 x USB3.0, 2 x USB2.0	
		1 x USB2.0 Type A on the board for USB dongle			
	COM	2 x COM(DB -9), selectable to support RS232 or RS485 mode by the switch, RS485 support auto flow control, (ESD protection for RS232: Air gap ±8KV, Contact±6KV)			
	Ethernet	2 x Intel GbE LAN controller			
	PoE	2 x Intel GbE PoE LAN controller, max. 15W per channel			
	DI	8 x DI NPN/PNP , isolated 2500 Vrms			
	DO	8 x DO, Transistor output, I _{max} :0.5A per channel, isolated 2500 Vrms			
	Light Control	4 x PWM Light power control with external trigger input, I _{max} : 1A per channel			
	DVI-D	Support up to 1920 x 1080 @ 60Hz			
	Expansions	1 x Full-size PCIe Mini slot with SIM card holder(with USB signal)			
Watch Dog	1~255 levels programmable				
OS Support	Microsoft Windows	Windows 7, Windows 7 Embedded, Windows 10 IoT			
	Linux	Ubuntu, CentOS, Debian			
Power	Voltage Input	DC12~24V ± 10%, overcurrent, overvoltage and polarity inverse protection, (Must be DC24V when using Light Control)			
	Power Consumption	Max. 120W			
Chassis	Structure	Aluminum-magnesium alloy box, Fanless, Wall-mounted or DIN -Rail			
	Dimensions	(L)200mm x (W)154.5mm x (H)74.6mm			
	Net Weight	2.1Kg			
Environment	Work Temperature	-20 °C ~ 60 °C (-4°F~140°F) with air flow (SSD)			
	Storage Temperature	-40 °C ~ 80 °C (-40°F ~ 176°F) with air flow (SSD)			
	Relative Humidity	5~95% (Non-condensing)			
	Operating Vibration	5~500Hz, 1.5Grms@with SSD, Follow IEC60068-2-64			
	Operating Shock	20G peak acceleration(11ms duration) with SSD, Follow IEC600682-27			
EMC	CE/FCC Class A				

■ Dimensions (Unit: mm)

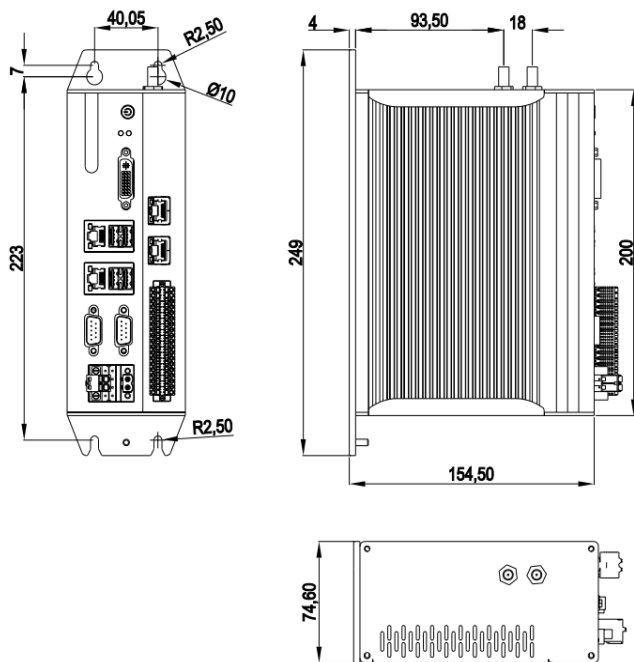

■ Interfaces

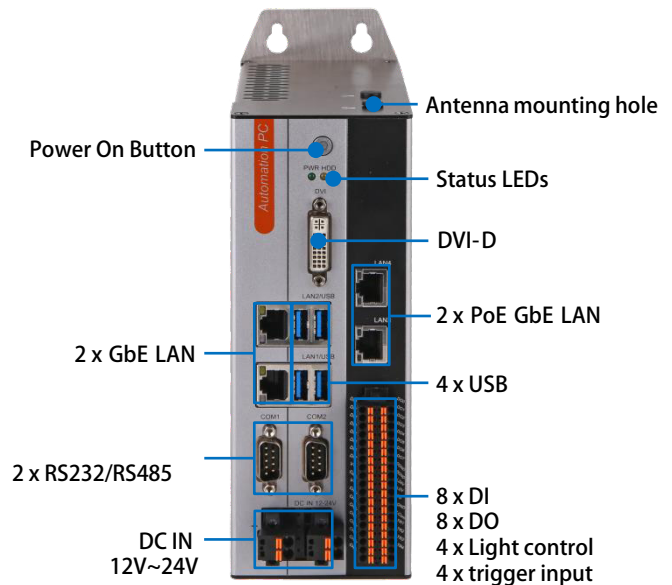

■ Ordering Information

Part No.	Product	Description
6070200016	NP-6111-JH2-J1900	CPU:J1900, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable) , 2 x LAN, 1 x USB3.0, 3 x USB2.0, DVI-D, 2 x PoE LAN, 8 x DI, 8 x DO, 4 x PWM output, DC12~24V Power input(Must be DC24V when using Light Control)
6070200113	NP-6111-JH2-E3845	CPU:E3845, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable) , 2 x LAN, 1 x USB3.0, 3 x USB2.0, DVI-D, 2 x PoE LAN, 8 x DI, 8 x DO, 4 x PWM output, DC12~24V Power input(Must be DC24V when using Light Control)
6070200163	NP-6111-JH2-J3455	CPU:J3455, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable) , 2 x LAN, 2 x USB3.0, 2 x USB2.0, DVI-D, 2 x PoE LAN, 8 x DI, 8 x DO, 4 x PWM output, DC12~24V Power input(Must be DC24V when using Light Control)
6070200164	NP-6111-JH2-J6412	CPU:J6412, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable) , 2 x LAN, 2 x USB3.0, 2 x USB2.0, DVI-D, 2 x PoE LAN, 8 x DI, 8 x DO, 4 x PWM output, DC12~24V Power input(Must be DC24V when using Light Control)

■ Options

Parts	Description
DDR3L Memory	DDR3L-1333MHz: 4GB, 8GB
DDR4 Memory	DDR4-2400MHz: 4GB, 8GB, 16GB
mSATA SSD	64GB, 128GB, 256GB, 512GB, 1TB
Wifi Set	miniPCIE WIFI Set (7260 series) ,Cylindrical antenna
3G/4G Module	mini PCIE: EC20, EG25, EC25
Mount Option	DIN-Rail

Note: If some optional parts are offered with the system, additional system certificates may be required in certain regions/countries. Please contact CCEST for certificate compliance.